

# EXHAUST POSITIONED AT THE DOWNSTREAM END OF A GLASS MELTING FURNACE

**Publication number:** WO02092521

**Publication date:** 2002-11-21

**Inventor:** BAKER DAVID J (US); ADAMS HARRY P (US);  
LEBLANC JOHN R (US)

**Applicant:** OWENS CORNING FIBERGLASS CORP (US); BOC  
GROUP INC (US); BAKER DAVID J (US); ADAMS  
HARRY P (US); LEBLANC JOHN R (US)

**Classification:**

- **international:** C03B5/04; C03B5/235; C03B5/237; C03B5/00; (IPC1-  
7): C03B5/04; C03B3/00; C03B5/237

- **European:** C03B5/04; C03B5/235; C03B5/237

**Application number:** WO2001US15967 20010516

**Priority number(s):** WO2001US15967 20010516

**Also published as:**

EP1390308 (A1)  
MXPA03010395 (A)  
EP1390308 (A0)  
CN1516680 (A)  
CA2448616 (A1)

more >>


**Cited documents:**

WO9610097  
SU1836603  
EP0359003  
DE9206502U  
US4481024  
more >>

**Report a data error here**

## Abstract of WO02092521

A glass-melting furnace (10) has an upstream end (6), a downstream end (8), and a roof (22). The upstream end is positioned upstream of the downstream end. A charger (32) is provided to supply glass-forming material (30) to the upstream end of the furnace. At least one burner (34) is provided to supply heat to the glass-forming material at the upstream end of the furnace. An exhaust (60) is in communication with the downstream end of the furnace, with the exhaust being positioned downstream of the at least one burner.

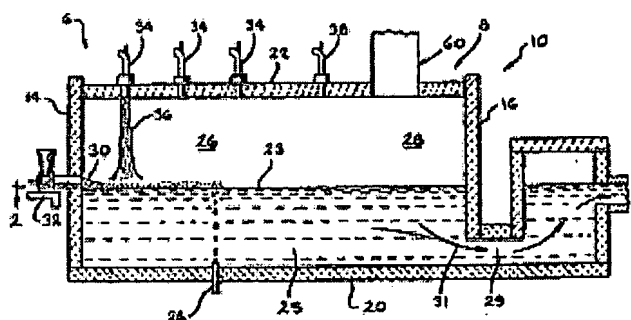

Data supplied from the esp@cenet database - Worldwide